

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 October 2005 (20.10.2005)

PCT

(10) International Publication Number
WO 2005/097323 A1

(51) International Patent Classification⁷: **B01L 3/00**

(21) International Application Number:
PCT/EP2004/050476

(22) International Filing Date: 7 April 2004 (07.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **AGILENT TECHNOLOGIES, INC.** [US/US]; 395 Page Mill Road, Palo Alto, CA 94306 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BERNDT, Manfred** [DE/DE]; In den Schneidergärten 10, 76307 Karlsbad (DE). **MORA-FILLAT, Jose** [DE/DE]; Bachstrasse 9, 76275 Ettlingen (DE). **EICKHOFF, Jan** [DE/DE]; Erlenweg 16, 75334 Straubenhardt (DE).

(74) Agent: **BARTH, Daniel**; Herrenberger Str. 130, 71034 Böblingen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

[Continued on next page]

(54) Title: COVER WITH RECLOSEABLE APERTURE

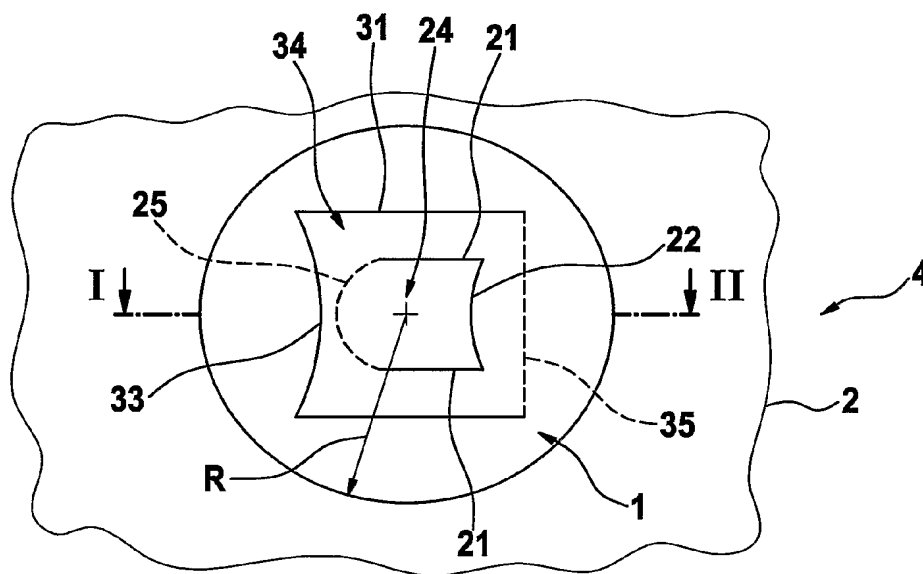

(57) **Abstract:** The invention discloses a cover (4) for sealing a container (1) and preferably containers (W^1) for a well plate (W). The cover is comprised of at least a top layer (2) and a bottom layer (3) structured in a way to form a recloseable aperture. Preferably, 5 each of the layers (2, 3) comprise a recloseable aperture structured as flap, damper, baffle or butterfly valve respectively, wherein the recloseable apertures are arranged on top of each other. In a preferred embodiment of the invention a third moveable layer (9) is arranged between the top and the bottom layer (2, 3). By moving the middle layer (9), the aperture in the cover (4) can be closed.

WO 2005/097323 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.